


→ ADA SIGN SUMMARY

The following rules apply to signs that identify a room, space or area. Informational and directional signs do not require Braille or raised characters, however may follow many of the other requirements. Please read this entire guide for a complete overview.

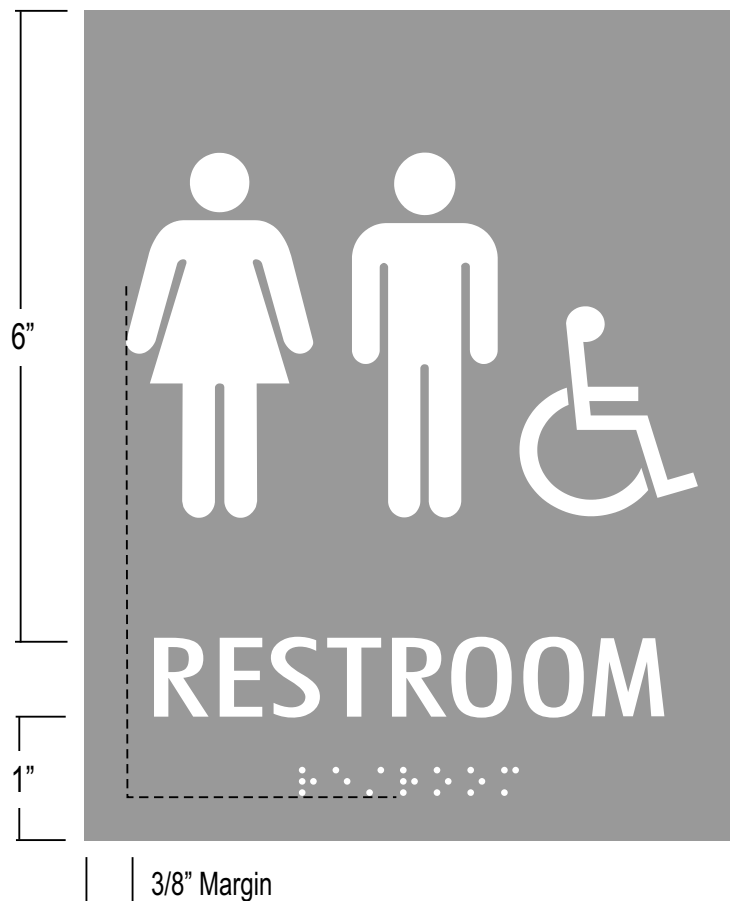

- 1 Signs that identify a room, space or area shall have raised characters and Braille. (216.2) (703.1)
- 2 Signs shall have a non-glare finish with contrasting colors. (703.6.2)
- 3 Pictograms shall be in their own 6" high field. Add an ISA symbol if accessible. (703.6.1)
- 4 Characters shall be Sans Serif and all Uppercase. (703.2.3) (703.2.2)
- 5 Characters must be between 5/8" and 2" with a minimum of 1/8" spacing. (703.2.5) (703.2.7)
- 6 Font shall be ADA compliant. Not overly bold, condensed, italic, etc. (703.2.4) (703.2.6)
- 7 A 3/8" minimum margin is required around all raised elements, including Braille. (703.2.7)
- 8 A 1" high space is needed for one line of Braille. (703.3.2)
- 9 Braille shall be all together and 3/8" to 1/2" below last line of text. (703.3.2)
- 10 Line Spacing shall be 35 - 70% of character height. (703.3.8)
- 11 ADA signs are required for both public access and all employee areas. (102.5A)

→ ADA SIGN TYPES

The chart below illustrates the requirements for each of the four ADA sign types.


IDENTIFICATION

Signs that identify a room, space, or area.



INFORMATIONAL

Signs that provide information about a room, space or area.



DIRECTIONAL

Signs that provide direction to a room, space, or area.



OVERHEAD SIGNS

Wall, ceiling, and projection type signs, mounted overhead.



SIGN FINISH

Non-Glare

Non-Glare

Non-Glare

Non-Glare

SIGN COLORS

Good Contrast

Good Contrast

Good Contrast

Good Contrast

BRAILLE REQUIRED

Yes

No

No

No

RAISED CHARACTERS

Yes

Not Required

Not Required

Not Required

PICTOGRAM REQUIREMENTS

Yes - See pg 7

No Special Req.

No Special Req.

No Special Req.

CHARACTER FONT

Sans Serif

Sans or Simple Serif

Sans or Simple Serif

Sans or Simple Serif

CHARACTERS HEIGHT

5/8" - 2"

5/8" Minimum *

5/8" Minimum *

2" Minimum *

CHARACTERS CASE

All Uppercase

Upper and/or Lower

Upper and/or Lower

Upper and/or Lower

CHARACTERS SPACING

1/8" - 4x Stroke

10 - 35% of Stroke

10 - 35% of Stroke

10 - 35% of Stroke

CHARACTERS STROKE

15% Max of Stroke

10 - 30% Stroke

10 - 30% Stroke

10 - 30% Stroke

MOUNTING REQUIREMENTS

See Page 11

None

None


Min. Clearance 80"

* See chart on page 9


→ **CHARACTERS/FONTS**

Fonts for room and area identification are required to be sans serif and shall not be italic, oblique, script, or decorative. Characters should be raised a minimum of 1/32" and between 5/8" and 2" in height.


Sans Serif




Serif




Min. Width 55%




Max. Width 110%



Raised 1/32"



Uppercase



ADA COMPLIANT

FUTURA MEDIUM 123

FRUTIGER BOLD 123

LUCIDA DEMIBOLD 123

TREBUCHET BOLD 123

HELVETICA 123

NOT COMPLIANT

TIMES ROMAN

GARAMOND

TIMES ROMAN

Times Roman

Maximum letter stroke for a tactile signs is 15% of character height → ← .15" as measured by the top of a beveled character.



5/8"



3/4"



7/8"



1"

→ **BRaille REQUIREMENTS**

There are many rules that govern proper Braille use:

- Braille shall be dome shaped - not flat or pointed.
- Braille shall be precisely sized and spaced.
- Braille shall be $\frac{3}{8}$ " to $\frac{1}{2}$ " below last line of text.
- Braille shall be contracted Grade II.
- Braille shall be in lower case except for proper names and acronyms or as a letter in a room number (B320).


ADA COMPLIANT




NOT COMPLIANT




BRaille SIZE



BRaille SPACING


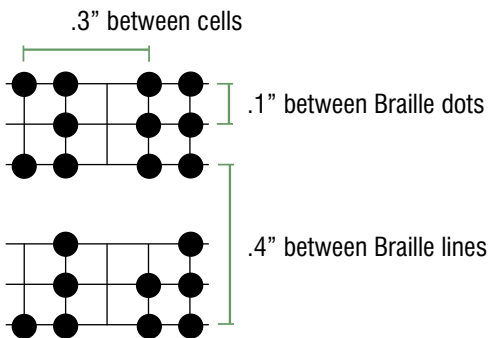


SPACING ON SIGN

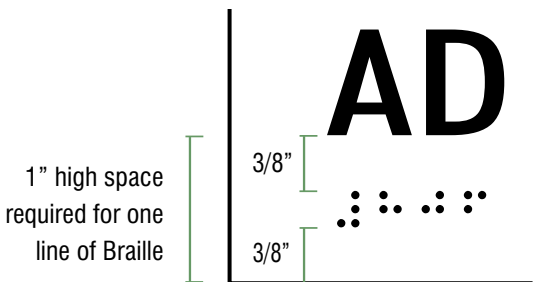

→ PICTOGRAMS

This chart depicts typical pictograms and their proper usage. Pictograms used in identifying a room or space shall be within a 6" high field. There is no specific rule on the height of the pictogram itself.

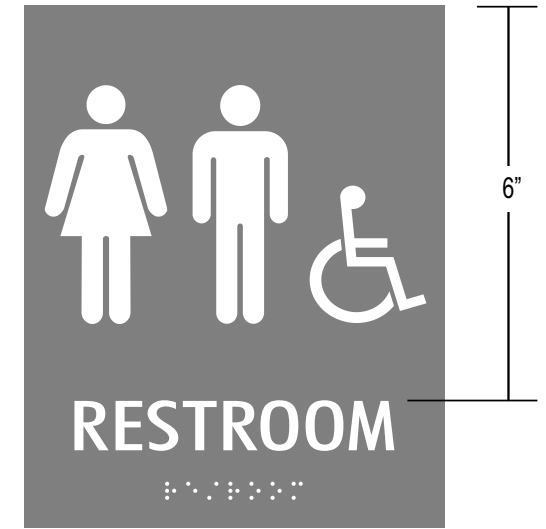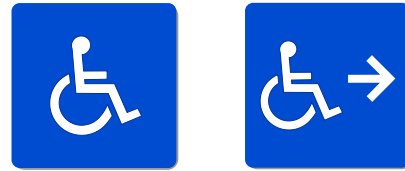


Required Pictograms.

6" high background field required.




Room Signs Pictograms are not required, but are recommended. If used, a 6" high background field is required.

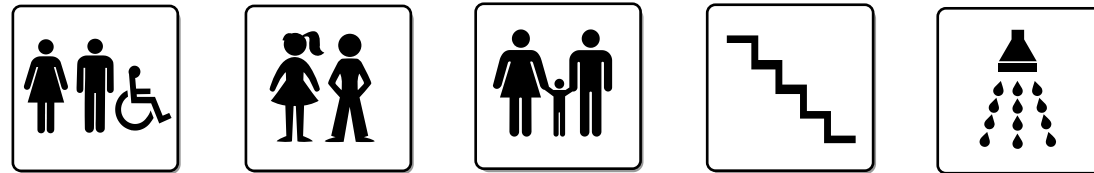


Miscellaneous Pictograms.

No field height requirement.

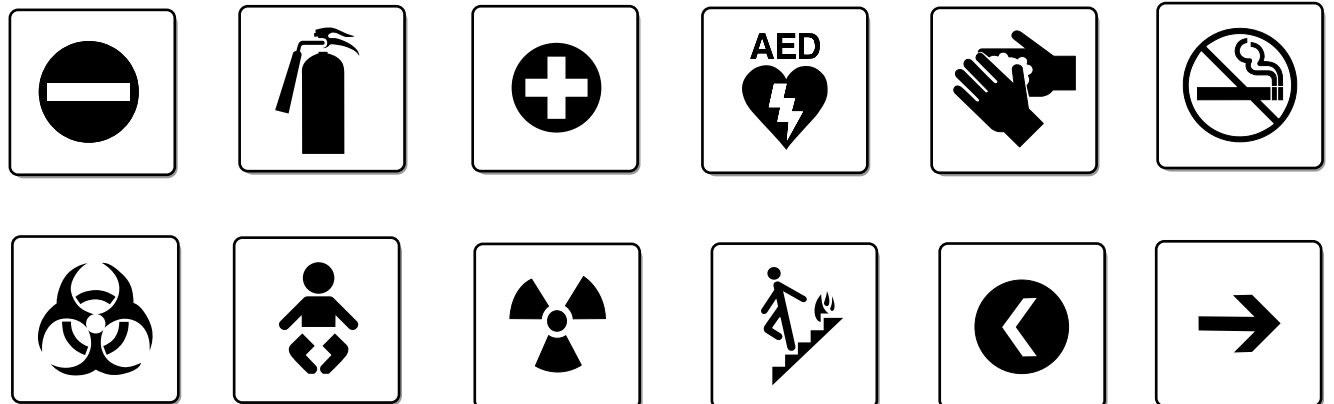

→ SPACING REQUIREMENTS

Sizing and spacing requirements are shown for signs that identify a room or space.

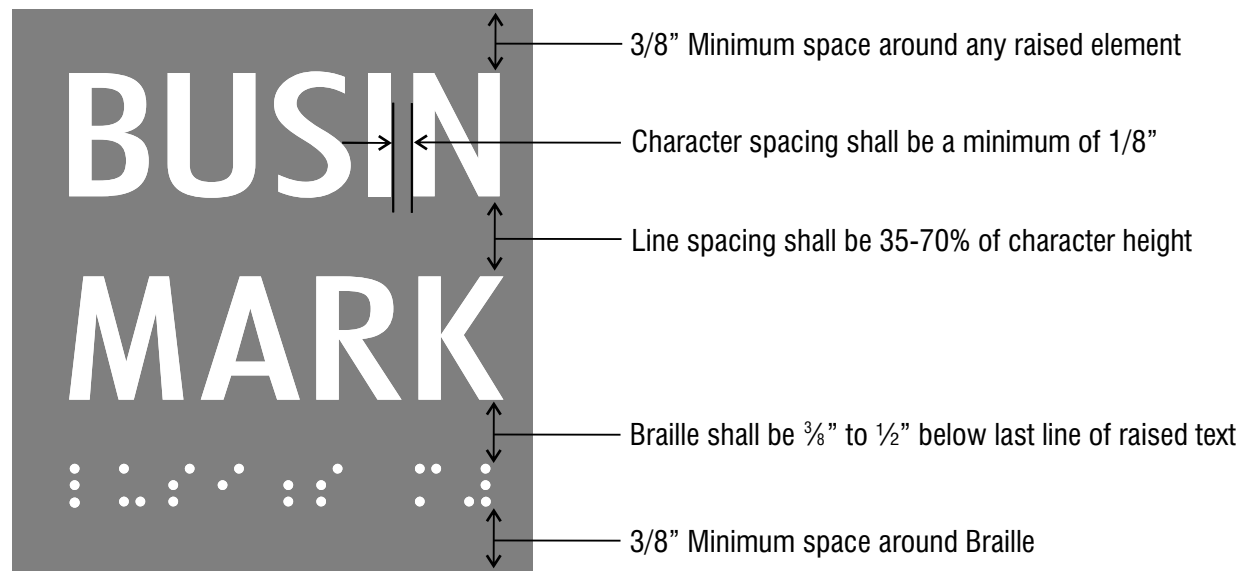

COMPLIANT ISSUE	SAMPLE LAYOUT	ADA RULE
Not enough character spacing →	SIGNAGE	Minimum 1/8" space between characters
Too much character spacing →	S I G N A G E	Maximum space of 4 x character stroke
Characters too condensed →	SIGNAGE	Minimum 55% of character height
Characters too extended →	SIGNAGE	Maximum 110% of character height
Character stroke too thick →	SIGNAGE	Maximum stroke is 15% of character height

→ Sizing Chart

This chart was developed to help you determine the proper size of your sign based on the various ADA laws. Use the matrix below to determine the necessary length and height of your sign.

		Length of Sign										
		3"	4"	5"	6"	7"	8"	9"	10"	12"	14"	16"
Letter Size	5/8"	4	7	9	11	13	15	17	19	23	27	31
	3/4"	3	5	7	9	11	12	13	15	19	21	24
	7/8"	3	4	5	7	8	10	11	12	14	17	20
	1"	3	4	5	6	7	8	10	11	13	14	15
	1.25"	2	2	3	4	5	6	7	8	10	10	11

Maximum number of characters and spaces per line based on letter height and sign length

		Height of Sign									
		3"	4"	4.5"	6"	7"	8"	9"	10"	12"	
Letter Size	5/8"	2	2	3	4	5	6	7	8	9	
	3/4"	1	2	3	3	4	5	6	6	8	
	7/8"	1	2	2	3	4	4	5	5	7	
	1"	1	2	2	3	3	4	5	5	6	
	1.25"	1	1	1	2	3	3	3	4	5	

Maximum number of lines allowed based on letter height

Example: 6 x 9" sign with 3/4" Letters


**MATERIALS AND
RESOURCES
BUILDING**

13 Maximum Number of Characters and Spaces per line

3 Maximum Number of Lines per sign

→ Mounting Requirements

Below are general guidelines for mounting room and overhead signs. Be sure to check with your state and/or local codes, as well as your building inspector before installing signs.

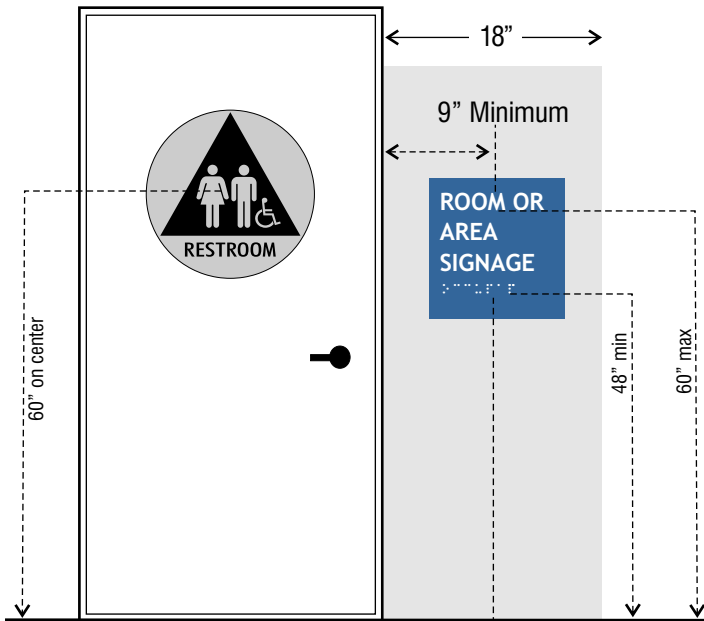

Center sign between an 18" minimum area and the "center of the tactile characters."

Maximum mounting height of tactile characters is 60" above floor to baseline of characters.


Minimum mounting height of Braille is 48" above floor to baseline of Braille cells.

Room signs to be mounted on the latch side of the door.

On double doors with both leafs active, the sign shall be mounted on the right side.

When there is not enough wall space for mounting the sign use the nearest adjacent wall.

Ceiling or wall projection signs must have a minimum clearance of 80" from bottom of sign to the floor.

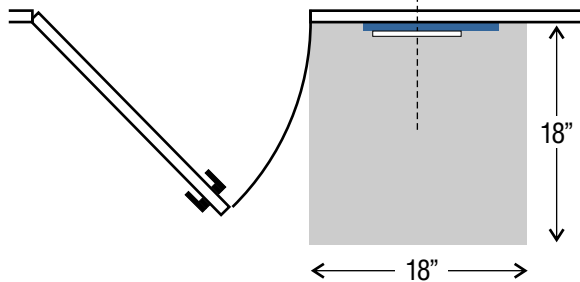

Signs containing tactile characters shall be located so that a clear floor space of 18" by 18" minimum, centered to the tactile characters, is provided beyond the arc of any door swing between the closed position and 45 degree open position.

OVERHEAD MOUNTED SIGN

80" Min